





Bar Caps

In Stock items (subject to prior sales)




These low friction, wear resistant UHMW caps are designed to clip onto various thicknesses of flat bar material. Applications include conveyor belt supporting and conveyor side or neck guides.

VG-P116HD




1/16" or
16 ga. bar

VG-P18BC
Standard



Can be used
as side guides


VG-P18HD
Heavy Duty



1/16"
or
16 ga.

P116SBC

Clips onto 1/16 in. or 16 ga. flat bar. Can be used as a standard belt support.




Material: UHMW

Part Number	Length (ft.)
VG-P116SBC-10	10
VG-P116SBC-20	20
VG-P116SBC-100	100*
VG-P116SBC-250	250*

1/8"
12 ga.
11 ga.

CSI

Clips onto 12 ga. or 11 ga. flat bar. Can be used as a special belt support or neck guide.




Material: UHMW

Part Number	Length (ft.)
VG-CSI-538-10	10
VG-CSI-538-20	20
VG-CSI-538-100	100*
VG-CSI-538-250	250*

P104D


Clips onto 1/16 in. or 16 ga. flat bar. Can be used for heavy duty applications.



VG-P104D-10	10
VG-P104D-20	20
VG-P104D-100	100*
VG-P104D-250	250*

P204


Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used as a special belt support.



VG-P204-10	10
VG-P204-20	20
VG-P204-100	100*
VG-P204-250	250*

P116HD


Clips onto 1/16 in. or 16 ga. flat bar. Can be used as a narrow belt support or for other heavy duty applications.



VG-P116HD-10	10
VG-P116HD-20	20

P18SBC


Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used as a standard belt support.



VG-P18SBC-10	10
VG-P18SBC-20	20
VG-P18SBC-100	100*
VG-P18SBC-250	250*

P18BC

Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used for standard applications.




VG-P18BC-10	10
VG-P18BC-20	20
VG-P18BC-100	100*
VG-P18BC-250	250*

P105R

Material: Grey Nolu-S or Grey Nolu-SR.

Clips onto 3/32 in. or 13 ga. flat bar. Can be used as a neck guide.




Nolu-SR helps guide PET containers in high speed applications.

Part Number	Nolu-SR	Nolu-S	Length (ft.)
VG-P105R-100	•		100*
VG-P105RCL-100	•		100*
VG-P105R-250	•		250*
VG-P105RCL-250	•		250*

P18HD

Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used as a narrow belt support or for other heavy duty applications.



VG-P18HD-10	10
VG-P18HD-20	20
VG-P18HD-100	100*
VG-P18HD-250	250*

*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.




In Stock items (subject to prior sales)

1/8"
12 ga.
11 ga.



P1345

Clips onto 1/8 in., 12 ga., or 11 ga. flat bar. Can be used for belt retention or support.



Material: UHMW


Part Number	Length (ft.)
VG-P1345-10	10
VG-P1345-20	20

3/16"
or
7 ga.



P316BC

Clips onto 3/16 flat bar. Can be used as a standard belt support.




Material: UHMW

Part Number	Length (ft.)
VG-P316BC-10	10
VG-P316BC-20	20
VG-P316BC-100	100*
VG-P316BC-250	250*



P316SBC

Clips onto 3/16 flat bar. Can be used as a standard belt support.




VG-P316SBC-10	10
VG-P316SBC-20	20
VG-P316SBC-100	100*
VG-P316SBC-250	250*



P316TBC

Clips onto 3/16 flat bar. Can be used as a standard belt support.

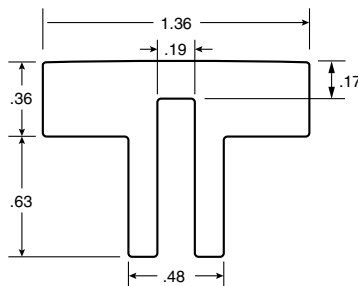

VG-P316TBC-10	10
VG-P316TBC-20	20


Shipping Information: UHMW covers and inserts are typically shipped straight in tubes. 8' lengths can be shipped UPS. Standard 10' or 20' lengths are shipped by common carrier. Selected items can be coiled into cartons for more convenient shipping.



Extended Coil Lengths: Items marked with this symbol are available in continuous lengths of 100' or more. These items must be coiled for shipping and handling.

P316HD

Clips onto 3/16 flat bar. Can be used as a heavy duty belt support.




Material: UHMW

Part Number	Length (ft.)
VG-P316HD-10	10
VG-P316HD-20	20

P7GABC

Clips onto 7 ga. steel. Can be used as a standard belt support. KVP equivalent wearstrip.




VG-P7GABC-10	10
VG-P7GABC-20	20
VG-P7GABC-100	100*
VG-P7GABC-250	250*



P7GAHD

Clips onto 7 ga. steel. Can be used for belt retention or support. KVP equivalent wearstrip.

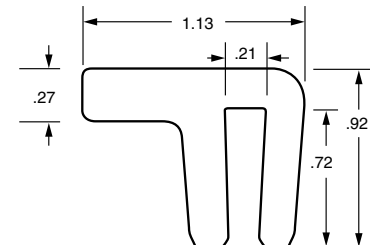

VG-P7GAHD-10	10
VG-P7GAHD-20	20

Options available for most wear strips:



Nolu-S UHMW:
(reduced friction)
add "-NS-" to
part number



Static Dissipative
UHMW:
add "-SD-" to
part number




Nolu-SR
UHMW:
add "-SR-" to
part number

Example: ⚡
VG-P316HD-NS-10

*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.



Bar Caps


 In Stock items (subject to prior sales)

6 mm



PM6BC

Clips onto 6 mm flat bar. Can be used as a standard belt support.



 Available
in Coils

Material: UHMW

Part Number	Length (ft.)
VG-PM6BC-10	10
VG-PM6BC-20	20
VG-PM6BC-100	100*
VG-PM6BC-250	250*

Options available for most wear strips:




Nolu-S UHMW:
(reduced friction)
add "-NS-" to
part number



Static Dissipative
UHMW:
add "-SD-" to
part number



Nolu-SR
UHMW:
add "-SR-" to
part number


Example: 
VG-P316HD-NS-10

1/4"



P14TBC

Clips onto 1/4 flat bar. Can be used as a standard belt support.




 Available
in Coils

VG-P14TBC-10	10
VG-P14TBC-20	20
VG-P14TBC-100	100*
VG-P14TBC-250	250*

P14BC

Clips onto 1/4 flat bar. Can be used as a standard belt support.




 Available
in Coils

Material: UHMW

Part Number	Length (ft.)
VG-P14BC-10	10
VG-P14BC-20	20
VG-P14BC-100	100*
VG-P14BC-250	250*

P14SBC

Clips onto 1/4 flat bar. Can be used as standard belt support.




 Available
in Coils


VG-P14SBC-10	10
VG-P14SBC-20	20
VG-P14SBC-100	100*
VG-P14SBC-250	250*

P14HD

Clips onto 1/4 flat bar. Can be used as a heavy duty belt support.



VG-P14HD-10	10
VG-P14HD-20	20

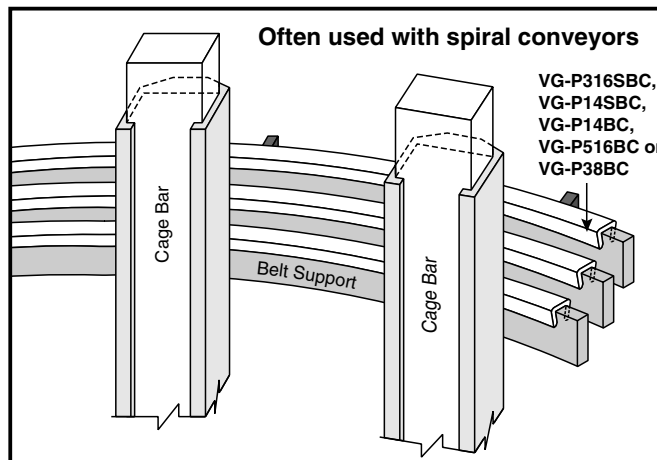

*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.




In Stock items (subject to prior sales)

5/16"



P516BC

Clips onto 5/16 flat bar. Can be used as a standard belt support.



Material: UHMW


Part Number	Length (ft.)
VG-P516BC-10	10
VG-P516BC-20	20
VG-P516BC-100	100*
VG-P516BC-250	250*

10 mm



PM10BC

Clips onto 10 mm flat bar. Can be used as a standard belt support.



Material: UHMW


Part Number	Length (ft.)
VG-PM10BC-10	10
VG-PM10BC-20	20
VG-PM10BC-100	100*
VG-PM10BC-250	250*

3/8"



P38BC

Clips onto 3/8 flat bar. Can be used as a standard belt support.




VG-P38BC-10	10
VG-P38BC-20	20
VG-P38BC-100	100*
VG-P38BC-250	250*

1/2"



P12BC


Clips onto 1/2 flat bar. Can be used as a standard belt support.




VG-P12BC-10	10
VG-P12BC-20	20
VG-P12BC-100	100*
VG-P12BC-250	250*

P38HD

Clips onto 3/8 flat bar. Can be used as an extra wide heavy duty belt support.



VG-P38HD-10	10
VG-P38HD-20	20

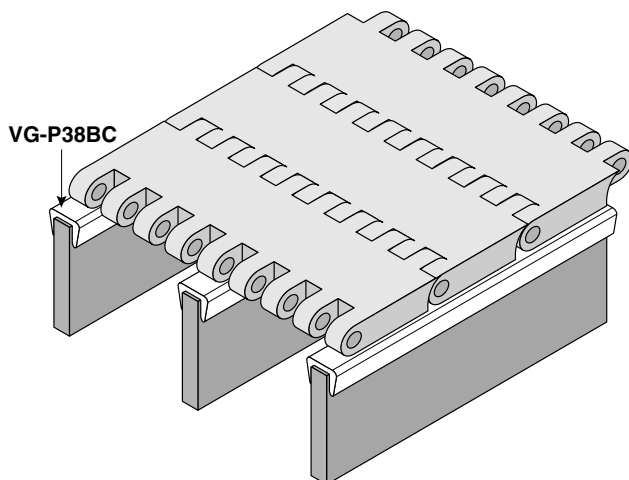

Shipping Information: UHMW covers and inserts are typically shipped straight in tubes. 8' lengths can be shipped UPS. Standard 10' or 20' lengths are shipped by common carrier. Selected items can be coiled into cartons for more convenient shipping.

Extended Coil Lengths: Items marked with this symbol are available in continuous lengths of 100' or more. These items must be coiled for shipping and handling.





*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.



J-Leg Profiles

In Stock items (subject to prior sales)

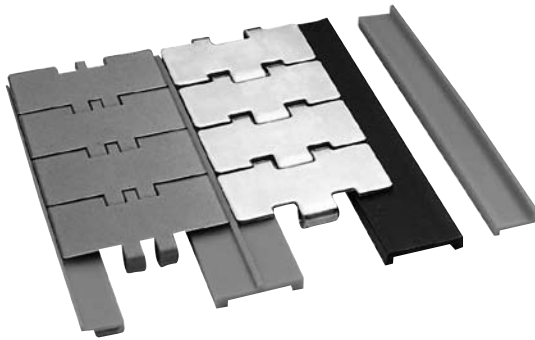


Superior chain interface and cleanliness make Solus J-Legs the right choice for domestic or international uses. Our J-Legs are designed to hold tight onto 11 ga. or 12 ga. sheet metal or 1/8 bar.




UHMW's natural low friction properties can be increased even further through the use of special additives. Our Nolu-S is a blend of UHMW and food grade lubricants, meeting the needs of ultra low-friction applications.

3/4" J-Legs




Material: UHMW-PE

Part Number	Color	Length (ft.)
VG-JSL075-125-10	white	10
VG-JSL075-125-20	white	20



Material: UHMW-PE


Part Number	Color	Length (ft.)
VG-JSL075-188-10	white	10
VG-JSL075-188-20	white	20



Material: UHMW-PE

Part Number	Color	Length (ft.)
VG-P18CC-10	white	10
VG-P18CC-20	white	20

NEW




Material: UHMW-PE

Part Number	Color	Length (ft.)
19003N	Black	200*
19003V	Green	200*

Material: Nolu-S UHMW-PE

Part Number	Color	Length (ft.)
19003NS	Light Grey	200*

NEW




Material: UHMW-PE

Part Number	Color	Length (ft.)
19007N	Black	200*
19007V	Green	200*

Material: Nolu-S UHMW-PE


Part Number	Color	Length (ft.)
19007NS	Light Grey	200*

1" J-Legs




Material: UHMW-PE

Part Number	Color	Length (ft.)
VG-JS100-125-10	white	10
VG-JS100-125-20	white	20
VG-JS100-125-100	white	100*
VG-JS100-125-250	white	250*




Material: UHMW-PE

Part Number	Color	Length (ft.)
VG-JS100-188-10	white	10
VG-JS100-188-20	white	20



Material: UHMW-PE


Part Number	Color	Length (ft.)
VG-JL081-188-10	white	10
VG-JL081-188-20	white	20



Material: UHMW-PE

Part Number	Color	Length (ft.)
VG-JEL-078-125-10	white	10
VG-JEL-078-125-20	white	20

Options available for most wear strips:



Black UHMW:
add "-B-" to
part number



Static Dissipative
UHMW:
add "-SD-" to
part number



Nolu-S UHMW:
(reduced friction)
add "-NS-" to
part number



Nolu-SR
UHMW:
add "-SR-" to
part number

Example: **VG-P316HD-NS-10**

*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.


Solus

J-Leg Profiles



Shipping Information: Standard 10' or 20' UHMW covers and inserts are typically shipped by common carrier. Selected items can be coiled into cartons for more convenient shipping through UPS.

Our J-Legs are designed to hold tight onto 11 ga. or 12 ga. sheet metal or 1/8 bar.




Extended Coil Lengths: Items marked with this symbol are available in continuous lengths of 100' or more. These items must be coiled for shipping and handling.




In Stock items (subject to prior sales)


1" J-Legs (continued)




Part Number	Length (ft.)
VG-J100-125T-10	10
VG-J100-125T-20	20
VG-J100-125T-100	100*
VG-J100-125T-250	250*



VG-J100-188-10	10
VG-J100-188-20	20
VG-J100-188-100	100*




VG-JEL081-125-10	10
VG-JEL081-125-20	20




VG-JL081-125-10	10
VG-JL081-125-20	20
VG-JL081-125-100	100*
VG-JL081-125-250	250*


1½" J-Legs




Part Number	Length (ft.)
VG-JS150-125-10	10
VG-JS150-125-20	20
VG-JS150-125-100	100*
VG-JS150-125-250	250*



VG-JS150-188-10	10
VG-JS150-188-20	20



VG-JL137-125-10	10
VG-JL137-125-20	20



VG-J150-125-10	10
VG-J150-125-20	20

UHMW Covers & Aluminum Rails

Options available for most wear strips:



Black UHMW:
add "B-" to
part number



Static Dissipative
UHMW:
add "SD-" to
part number



Nolu-S UHMW:
(reduced friction)
add "NS-" to
part number



Nolu-SR
UHMW:
add "SR-" to
part number


Example: **VG-P316HD-NS-10**

*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.


Solus




J-Leg Profiles

 In Stock items (subject to prior sales)


2" J-Legs




Part Number	Length (ft.)
VG-JS200-125-10	10
VG-JS200-125-20	20



VG-JS200-188-10	10
VG-JS200-188-20	20




VG-J200-125-10	10
VG-J200-125-20	20




VG-J200-188-10	10
VG-J200-188-20	20

NEW


2 7/8" and 3" J-Legs



Part Number	Length (ft.)
VG-J300-125-10	10
VG-J300-125-20	20




VG-J300-188-10	10
VG-J300-188-20	20



VG-J288-188-10	10
VG-J288-188-20	20


UHMW Covers & Aluminum Rails

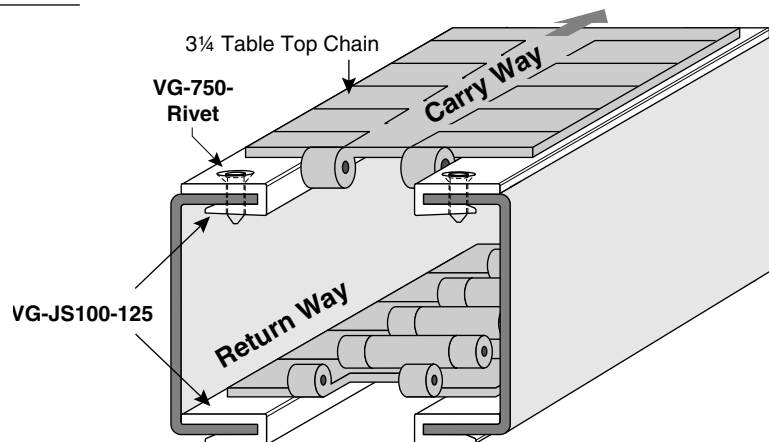



In Stock items (subject to prior sales)


Additional J-Leg Profiles



For use with 3/16" material




Part Number	Length
VG-JS3-075-125-10	10
VG-JS3-075-125-20	20
VG-JS3-075-125-100	100*
VG-JS3-075-125-250	250*




For use with 3/16" material

D dim.	W dim.	Part Number (10 ft.)	Part Number (20 ft.)
5/8	3/4	VG-J3-075-250-10	VG-J3-075-250-20
7/8	1	VG-J3-100-250-10	VG-J3-100-250-20
1-7/8	2	VG-J3-200-250-10	VG-J3-200-250-20




For use with 1/4" material

3/4	7/8	VG-J4-088-188-10	VG-J4-088-188-20
1	1-1/8	VG-J4-113-188-10	VG-J4-113-188-20
1-1/4	1-3/8	VG-J4-138-188-10	VG-J4-138-188-20
1-1/2	1-5/8	VG-J4-163-188-10	VG-J4-163-188-20
2	2-1/8	VG-J4-213-188-10	VG-J4-213-188-20




For use with 1/4" material

1	1-1/8	VG-J4-113-09-10	VG-J4-113-09-20
1-1/2	1-5/8	VG-J4-163-09-10	VG-J4-163-09-20
2	2-1/8	VG-J4-213-09-10	VG-J4-213-09-20

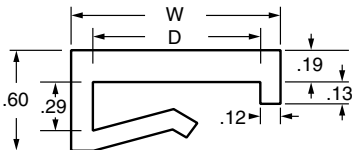


For use with 1/4" material

1	1-1/4	VG-JDL4-125-188-10	VG-JDL4-125-188-20
1-1/4	1-1/2	VG-JDL4-150-188-10	VG-JDL4-150-188-20
1-1/2	1-3/4	VG-JDL4-175-188-10	VG-JDL4-175-188-20
2	2-1/4	VG-JDL4-225-188-10	VG-JDL4-225-188-20

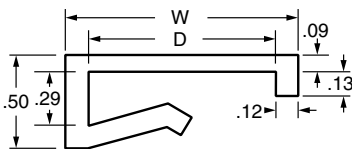

For use with 1/4" material

1	1-1/4	VG-JDL4-125-09-10	VG-JDL4-125-09-20
1-1/2	1-3/4	VG-JDL4-175-09-10	VG-JDL4-175-09-20
2	2-1/4	VG-JDL4-225-09-10	VG-JDL4-225-09-20

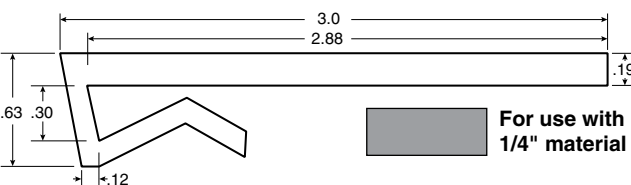

For use with 1/4" material


VG-J4-300-188-10	10
VG-J4-300-188-20	20

*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.

Solus





Wear Strip Profiles and Round Bar Covers

 In Stock items (subject to prior sales)

P417CT

Wear Strip Profiles





Material: UHMW

Part Number Length (ft.)


VG-P417CT-10 10

P7701

Wear Strip Profiles




VG-P7701-10 10

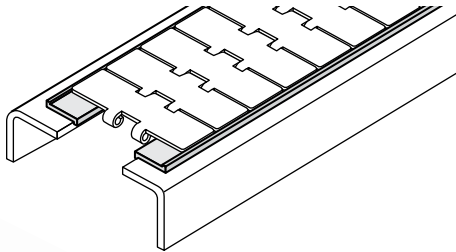

UHMW Covers & Aluminum Rails




These low friction, wear resistant UHMW covers are designed to fit around various diameters of round rod. Applications include conveyor side guides.

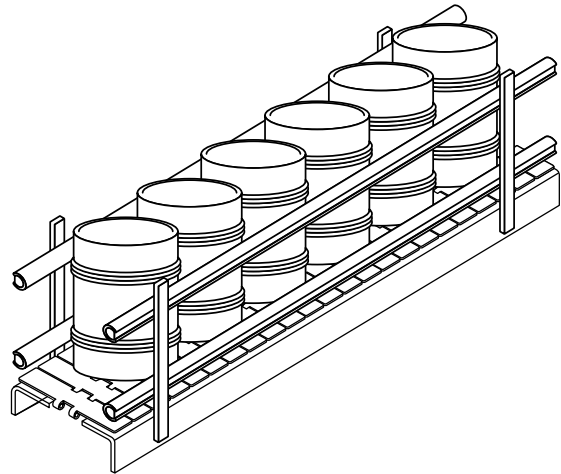

P516RD

5/16 full round side guide.
Clips onto
5/16 diameter rod.



Material: UHMW

Part Number Length (ft.)

VG-P516RD-10 10


VG-P516RD-20 20

VG-P516RD-100 100*

VG-P516RD-250 250*

P12RD

1/2 full round side guide.
Clips onto
1/2 diameter rod.



Material: UHMW

Part Number Length (ft.)

VG-P12RD-10 10


VG-P12RD-20 20

VG-P12RD-100 100*

VG-P12RD-250 250*

P38RD

3/8 full round side guide.
Clips onto
3/8 diameter rod.



VG-P38RD-10 10


VG-P38RD-20 20

VG-P38RD-100 100*

VG-P38RD-250 250*

P58RD

5/8 full round side guide.
Clips onto
5/8 diameter rod.




VG-P58RD-10 10

VG-P58RD-20 20

P34RD

3/4 full round side guide.
Clips onto
3/4 diameter rod.



VG-P34RD-10 10

VG-P34RD-20 20

Shipping Information: UHMW covers and inserts are typically shipped straight in tubes. 8' lengths can be shipped UPS. Standard 10' or 20' lengths are shipped by common carrier. Selected items can be coiled into cartons for more convenient shipping.

Extended Coil Lengths: Items marked with this symbol are available in lengths of 100' or more. These items must be coiled for shipping and handling.



*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.

Solus

Half Round Bars and Covers




In Stock items (subject to prior sales)



These low friction, wear resistant UHMW covers are designed to fit around various diameters of half round rod. Applications include conveyor side guides.

P12HR

1/2 half round side guide.
Clips onto
1/2 diameter
half round rod.




Material: UHMW

Part Number	Length (ft.)
VG-P12HR-10	10
VG-P12HR-20	20

P34HR

3/4 half round side guide.
Clips onto
3/4 diameter
half round rod.




Material: UHMW

Part Number	Length (ft.)
VG-P34HR-10	10
VG-P34HR-20	20
VG-P34HR-100	100*
VG-P34HR-250	250*



P58HR


5/8 half round side guide.
Clips onto
5/8 diameter
half round rod.



VG-P58HR-10	10
VG-P58HR-20	20
VG-P58HR-100	100*
VG-P58HR-250	250*

P34HRL

3/4 half round side guide with leg. Clips onto 3/4 diameter half round rod.




VG-P34HRL-10	10
VG-P34HRL-20	20

*Extruded profiles stored in coils will have the tendency to retain a certain deformation when uncoiled, therefore consistency in the profile cross section over the full length of the coil cannot be guaranteed.



S12HR

1/2 half round rod.




Material: Stainless steel

Part Number	Length (ft.)
VG-S12HR-10	10
VG-S12HR-20	20

S58HR


5/8 half round rod.



VG-S58HR-10	10
VG-S58HR-20	20


S34HR

3/4 half round rod.



Material: Stainless steel


Part Number	Length (ft.)
VG-S34HR-10	10
VG-S34HR-20	20

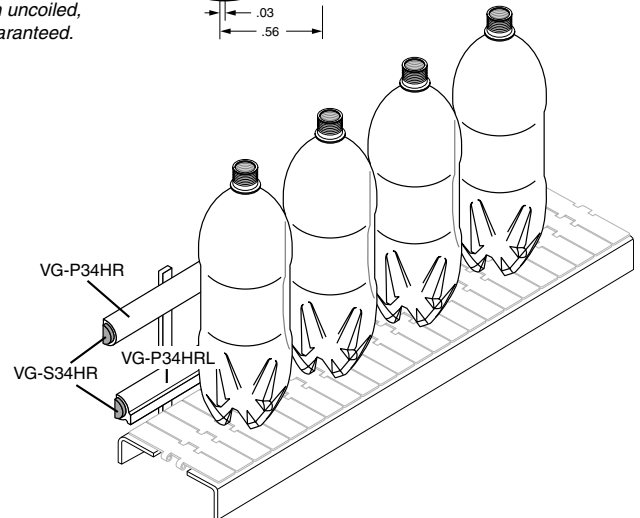


UHMW Covers & Aluminum Rails





Tube Covers

 In Stock items (subject to prior sales)



These low friction, wear resistant UHMW covers are designed to fit around various sizes of tubing or bar. Applications include spiral conveyor vertical member wear strips.

Also see
page 256

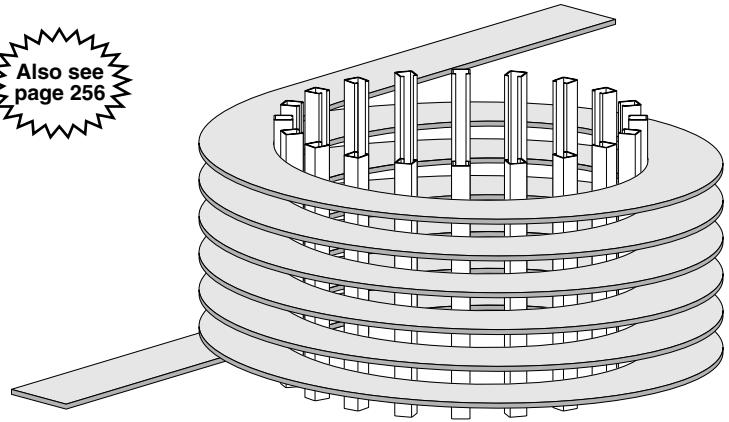


P1x1BC

1 x 1 tube cover.

Material: UHMW


Part Number	Length (ft.)
VG-P1x1BC-10	10
VG-P1x1BC-20	20



P1010RBC

1 x 1 ribbed tube cover.


VG-P1010RBC-10	10
VG-P1010RBC-20	20



P125125BC

1-1/4 x 1-1/4 tube cover.

VG-P125125BC-10	10
VG-P125125BC-20	20




P5010BC

1/2 x 1 bar cover.

Material: UHMW


Part Number	Length (ft.)
VG-P5010BC-10	10
VG-P5010BC-20	20



P58115BC

9/16 x 1-1/8 bar cover.


VG-P58115BC-10	10
VG-P58115BC-20	20



P1515BC

1-1/2 x 1-1/2 tube cover.


VG-P1515BC-10	10
VG-P1515BC-20	20



P1520BC

1-1/2 x 2 tube cover.


VG-P1520BC-10	10
VG-P1520BC-20	20



P2x2BC

2 x 2 tube cover.

VG-P2x2BC-10	10
VG-P2x2BC-20	20

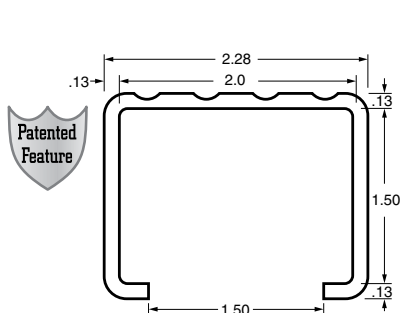


P1520RBC

1-1/2 x 2 ribbed tube cover.

VG-P1520RBC-10	10
VG-P1520RBC-20	20




In Stock items (subject to prior sales)




P2515BBC

Barbed belt support. For use with 1/4 x 1-1/2 bar.




Material: UHMW

Part Number	Length (ft.)
VG-P2515BBC-10	10
VG-P2515BBC-20	20




P2515DBC

Table top chain track. For use with 1/4 x 1-1/2 bar.



Material: UHMW


Part Number	Length (ft.)
VG-P2515DBC-10	10
VG-P2515DBC-20	20




UHMW Covers & Aluminum Rails

P2510BC

UHMW cover. For use with 1/4 x 1 bar.




VG-P2510BC-10	10
VG-P2510BC-20	20




P1878BC

Side guide. For use with 1/8 x 7/8 bar.




VG-P1878BC-10	10
VG-P1878BC-20	20




P1910BC

Side guide. For use with 3/16 x 1 bar.




VG-P1910BC-10	10
VG-P1910BC-20	20




P2510NBC

Side guide. For use with 1/4 x 1 bar.



VG-P2510NBC-10	10
VG-P2510NBC-20	20



Options available for most wear strips:



Black UHMW:
add "-B-" to
part number



Static Dissipative
UHMW:
add "-SD-" to
part number



Nolu-S UHMW:
(reduced friction)
add "-NS-" to
part number




Nolu-SR
UHMW:
add "-SR-" to
part number

Example: ⚡
VG-P316HD-NS-10




Bar Covers

 In Stock items (subject to prior sales)


P2515BC

Belt support. For use with
1/4 x 1-1/2 bar.




Material: UHMW

Part Number	Length (ft.)
VG-P2515BC-10	10
VG-P2515BC-20	20




P2115BC

Side guide. For use with
3/16 x 1-1/2 bar.




Material: UHMW

Part Number	Length (ft.)
VG-P2115BC-10	10




P2520BC

Side Guide. For use with
1/4 x 2 bar.




VG-P2520BC-10	10
VG-P2520BC-20	20

Also part of combination rails
found on page 271.




P3920BC

Side Guide. For use with
3/8 x 2 bar.




VG-P3920BC-10	10
VG-P3920BC-20	20




P2520NBC

Belt support. For use with
1/4 x 2 bar.




VG-P2520NBC-10	10
VG-P2520NBC-20	20

Also part of combination rails
found on page 271.




P5015BC

Side guide. For use
with 1/2 x 1-1/2 bar.




VG-P5015BC-10	10
VG-P5015BC-20	20

Also shown on page 274-275.




P5020BC

Side guide. For use with
1/2 x 2 bar.



VG-P5020BC-10	10
VG-P5020BC-20	20

Also shown on page 274.




Combination Aluminum and UHMW Guide Rails



In Stock items (subject to prior sales)





Solus has designed aluminum extrusions which are now commonly used as side guide rails and as support members under belting and tabletop chain. The wear resistant inserts are made from UHMW materials. There are a number of interchangeable combinations for use in a variety of packaging machine and conveying applications. The aluminum rails are rugged, easily mounted structural members and the plastic inserts protect the package being conveyed from any metal contact and create a low friction, non-marring surface to guide and support the product.

Shipping Information: UHMW covers and inserts are typically shipped straight in tubes. 8' lengths can be shipped UPS. Standard 10' or 20' lengths are shipped by common carrier. Selected items can be coiled into cartons for more convenient shipping.

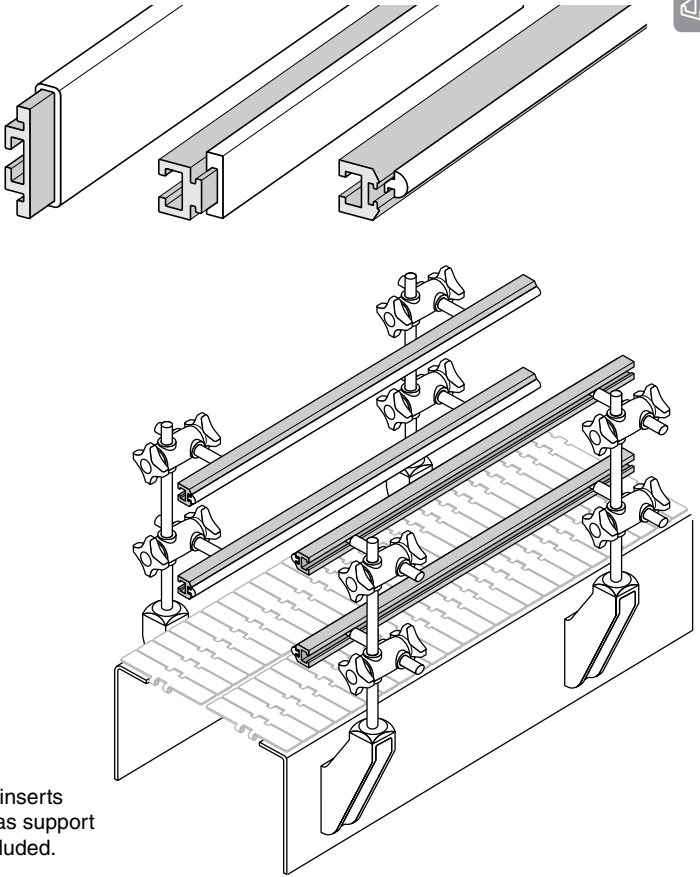



Combination Group A

The following aluminum extrusions can be used with any of the UHMW inserts listed in this group. These rails are commonly used as side guides and as support members under belting and table top chain. Fastening hardware not included.





Material: Aluminum

			Length (ft.)
VG-A700-10	VG-A500-10	VG-A1000-10	10
VG-A700-20	VG-A500-20	VG-A1000-20	20



Material: UHMW


			Length (ft.)
VG-P2007-10	VG-P512-10	VG-P512R-10	10
VG-P2007-20	VG-P512-20	VG-P512R-20	20



Solus








Combination Aluminum and UHMW Guide Rails

 In Stock items (subject to prior sales)

Combination Group B

The following aluminum extrusions can be used with any of the UHMW inserts listed in this group. These rails are commonly used as side guides and as support members under belting and table top chain. Fastening hardware not included.



Material: Aluminum

Length (ft.)

VG-A600-8

8

VG-A275-10

VG-A225-10

VG-A600-10

VG-A900-10

10





VG-A275-20

VG-A225-20

VG-A600-20

VG-A900-20

20



Material: UHMW

Length (ft.)

VG-P813-10

VG-P813F-10

VG-P0808-10

VG-P611-10

10

VG-P813-20

VG-P813F-20






VG-P0808-20

20

VG-P813-100

VG-P813F-100

100



VG-A600

VG-P816F

Material: UHMW

Length (ft.)

VG-P816F-10

VG-P820F-10

VG-P822F-10

VG-P824F-10

VG-P834F-10

10

VG-P816F-20

VG-P820F-20

VG-P822F-20

VG-P824F-20

VG-P834F-20

20

Options available for most wear strips:



Nolu-S UHMW:
(reduced friction)
add "NS-" to
part number





Static Dissipative
UHMW:
add "SD-" to
part number



Nolu-SR
UHMW:
add "SR-" to
part number

Example:
VG-P316HD-NS-10

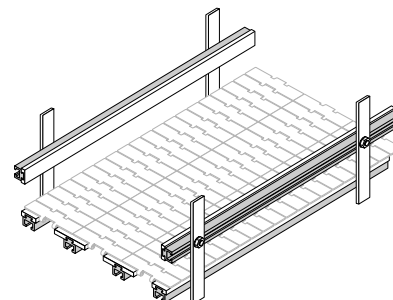

Solus




In Stock items (subject to prior sales)

Combination Group C

The following aluminum extrusions can be used with any of the UHMW inserts listed in this group. These rails are commonly used as side guides and as support members under belting and table top chain. The aluminum rail fastens with a 1/4 hex head bolt (not included).

		Material: Aluminum		Material: UHMW
		Length (ft.)		Length (ft.)
VG-A1878-10	VG-A1878T-10	10	VG-P1878BC-10	10
VG-A1878-20	VG-A1878T-20	20	VG-P1878BC-20	20

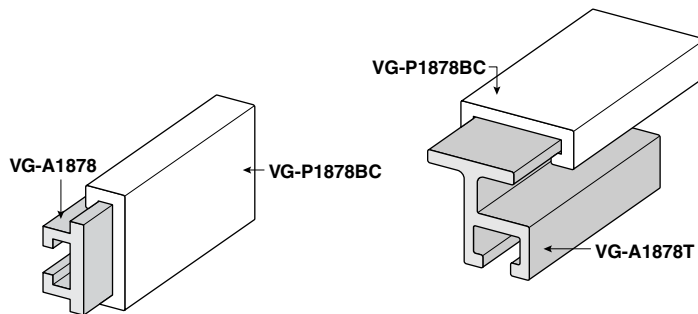

Options available for most wear strips:

Nolu-S UHMW:
(reduced friction)
add "-NS-" to
part number

Static Dissipative
UHMW:
add "-SD-" to
part number

Nolu-SR
UHMW:
add "-SR-" to
part number

Example: ⚡
VG-P316HD-NS-10

UHMW Covers & Aluminum Rails

Combination Group D

The following aluminum extrusions can be used with any of the UHMW inserts listed in this group. These rails are commonly used as side guides and as support members under belting and table top chain. The aluminum rail fastens with a 5/16 carriage head bolt (not included).

Material:
Aluminum

Length (ft.)

Material:
UHMW

Length (ft.)


Material:
UHMW

Length (ft.)

Material:
UHMW


Length (ft.)

VG-A2520-10	10	VG-P2520BC-10	VG-P2520NBC-10	VG-P2520WBC-10	10
VG-A2520-20	20	VG-P2520BC-20	VG-P2520NBC-20		20

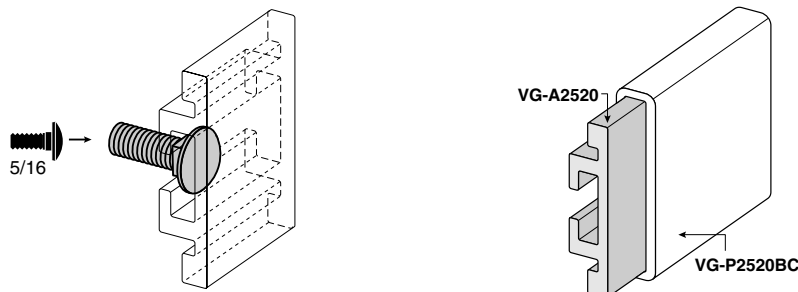



Aluminum and UHMW Guide Rails



 In Stock items (subject to prior sales)

A350



Light Duty Aluminum Rail

Light duty. Accepts VG-P350 UHMW cover. Fastens with 5/16 hex head bolt (not included).




Material: Aluminum

Part Number	Length (ft.)
VG-A350-10	10
VG-A350-20	20


P350

UHMW Cover

For use with VG-A350 rail.



VG-A350



VG-P350



Material: UHMW

Part Number	Length (ft.)
VG-P350-10	10
VG-P350-20	20

A5015

Aluminum Guide Rail

Aluminum extrusions commonly used as side guide rails and as support members under belting and table top chain. Fastens with 5/16 carriage bolt (not included).




Material: Aluminum

Part Number	Length (ft.)
VG-A5015-10	10
VG-A5015-20	20


P5015BC

UHMW Cover

Low friction, wear resistant UHMW cover designed to be used with VG-A5015.



VG-A5015



VG-P5015BC

Material: UHMW



Part Number	Length (ft.)
VG-P5015BC-10	10
VG-P5015BC-20	20

Also shown on page 268.

A5020

Aluminum Rail

Accepts VG-P5020BC UHMW cover. Fastens with 3/8 carriage bolt (not included).




Material: Aluminum

Part Number	Length (ft.)
VG-A5020-10	10
VG-A5020-20	20


P5020BC

UHMW Cover

For use with VG-A5020 rail.



VG-A5020



VG-P5020BC

Material: UHMW

Part Number	Length (ft.)
VG-P5020BC-10	10
VG-P5020BC-20	20

Solus





In Stock items (subject to prior sales)

5015

Steel Rail

Galvanized (G5015) or stainless steel (S5015). Accepts VG-P5015BC UHMW cover. Fastens with 3/8 carriage head bolt (not included).





Material: Galvanized (G) or stainless steel (S).

Part Number	Length (ft.)
VG-G5015-10	10
VG-G5015-20	20
VG-S5015-10	10
VG-S5015-20	20

P5015BC

UHMW Cover

For use with VG-G5015 or VG-S5015 rail or any 1/2 x 1-1/2 bar.

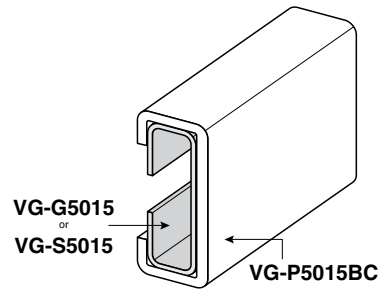



Material: UHMW

Part Number	Length (ft.)
VG-P5015BC-10	10
VG-P5015BC-20	20

UHMW Covers & Aluminum Rails

P2.5DB

Dogbone

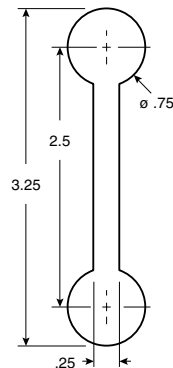

Material: UHMW

Part Number	Length (ft.)
VG-P2.5DB-10	10
VG-P2.5DB-20	20